



SPECIFICATION

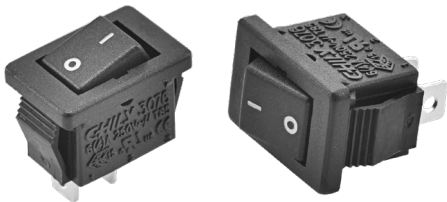

RATING:	6(4)A 250V~ T85 (UL, CUL,ENEC)
	4/64A 250V~ T85 (UL,CUL,ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

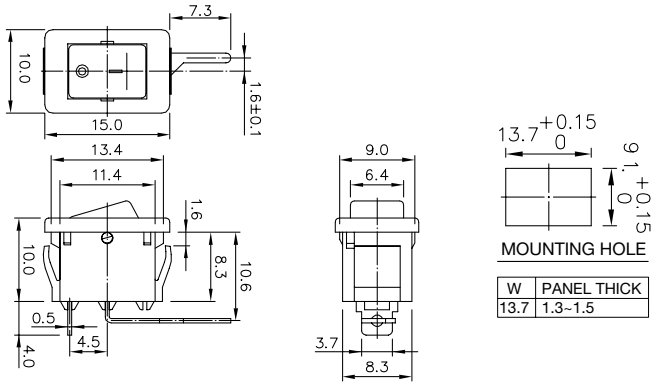

HOW TO ORDER

