


SPECIFICATION



RATING:	16A 125VAC, 10A 277VAC (UL, CUL) 16(6)A 250V~ T100 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~100°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

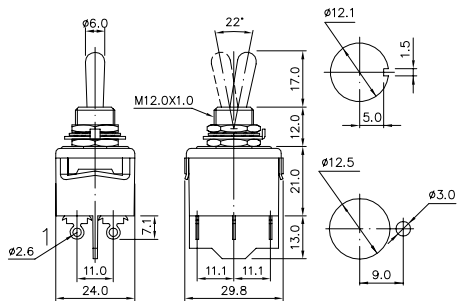

PANEL LAYOUT


HOW TO ORDER

6021 - □ - □ - □ - □


SWITCH FUNCTION

6021 : ON-OFF(UL, C-UL)
6022 : ON-ON(UL, C-UL)
6023 : ON-OFF-ON
6024 : (ON)-OFF
6025 : ON-(ON)
6026 : (ON)-OFF-(ON)
6027 : ON-OFF-(ON)

SHAFT



TERMINAL



SAFETY

