




SPECIFICATION

RATING:	16(6)A 250V~T55 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~55°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

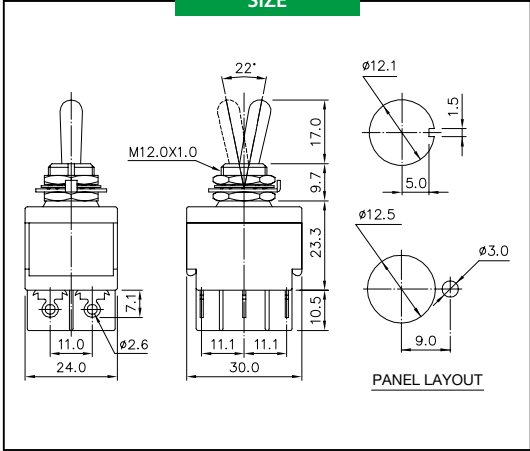

HOW TO ORDER

802X — □ — □ — □

SWITCH FUNCTION

8021 : ON-OFF
8022 : ON-ON
8023 : ON-OFF-ON

SHAFT

K1: MATERIAL: PLASTICS	K2: MATERIAL: METAL
-------------------------------	----------------------------

TERMINAL

T1: $\phi 2.6$	T2: 6.35x0.8	T3: M3.0x0.5
-----------------------	--------------	--------------