

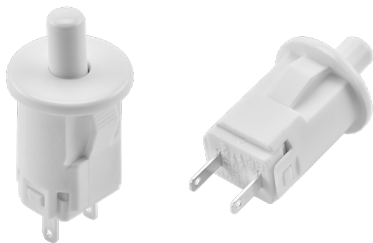



SPECIFICATION



RATING:	0.3A 125VAC, 0.15A 250VAC T125 5E4 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~125°C
ELECTRICAL LIFE:	50,000 CYCLES

SIZE



W	PANEL THICK
13.8	1.0 ~ 1.5
14.6	1.5 ~ 3.0

MOUNTING HOLE
(FOR REFERENCE)