


SPECIFICATION

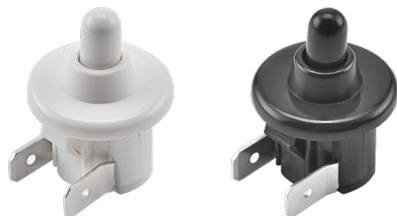

RATING: 0.2(0.2)A 250~ 25T125 5E4

INSULATION RESISTANCE: DC 500V 100MΩ OR MORE

CONTACT RESISTANCE: DC 2-4V 1A 20mΩ OR LESS

WITHSTAND VOLTAGE: AC 1500V FOR 1 Min

AMBIENT TEMPERATURE: -25~125°C

ELECTRICAL LIFE: 50,000 CYCLES

SIZE

