



SPECIFICATION

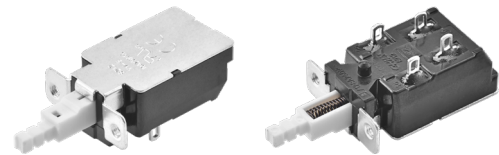


RATING:	10A 250VAC, TV-8 (UL, CUL)
	8/128A 250V~ 10T85 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	-10~85°C
ELECTRICAL LIFE:	10,000 CYCLES

DPST

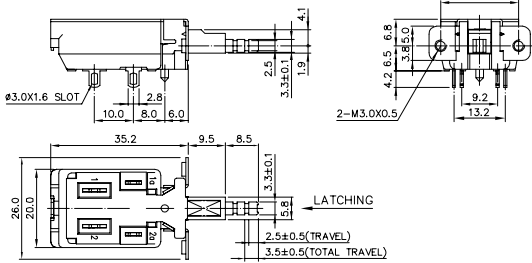

SPST

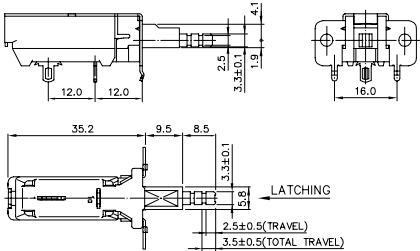

HOW TO ORDER

8212

—



BRACKET

TERMINAL

CIRCUIT

B1: (DPST) M3.0x0.5,Pitch=20.0	B3: (DPST) Ø3.5,Pitch=30.0	B5: (SPST) M3.0x0.5,Pitch=20.0	B7: (SPST)
B2: (DPST) Ø3.2,Pitch=20.0	B4: (DPST)	B6: (SPST) Ø3.2,Pitch=20.0	B8: (DPST)
			B9: (SPST) Ø3.2,Pitch=20.0

T1: 2.8x0.8	C01: ON-OFF
T2:	C02: (ON)-OFF