


SPECIFICATION

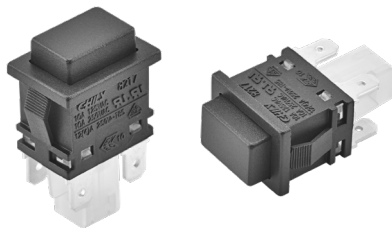

RATING: 10A 125/250VAC (UL, CUL)

INSULATION RESISTANCE: DC 500V 100MΩ OR MORE

CONTACT RESISTANCE: DC 2-4V 1A 20mΩ OR LESS


WITHSTAND VOLTAGE: AC 1500V FOR 1 Min

AMBIENT TEMPERATURE: 0~55°C

ELECTRICAL LIFE: 6,000 CYCLES

SIZE

KNOB TYPE



W	PANEL THICK
19.4	0.75 ~ 1.25
19.7	1.25 ~ 2.00
20.0	2.00 ~ 3.00

MOUNTING HOLE
(FOR REFERENCE)

SWITCH FUNCTION

MODEL NO.	OFF	ON	OPERATIONS
8217	OFF	ON	SPST
8217	OFF	ON	DPST
8217	OFF	(ON)	SPST
8217	OFF	(ON)	DPST

