


SPECIFICATION



|                        |                                                                                          |
|------------------------|------------------------------------------------------------------------------------------|
| RATING:                | 1/3HP 125/250VAC, 25A 125/250VAC (UL,CUL)<br>20.2A 125/250VAC, 30.2A 125/250VAC (UL,CUL) |
| INSULATION RESISTANCE: | DC 500V 100MΩ OR MORE                                                                    |
| CONTACT RESISTANCE:    | DC 2-4V 1A 20mΩ OR LESS                                                                  |
| WITHSTAND VOLTAGE:     | AC 1500V FOR 1 Min                                                                       |
| AMBIENT TEMPERATURE:   | 0~55°C                                                                                   |
| ELECTRICAL LIFE:       | 6,000 CYCLES                                                                             |

SIZE

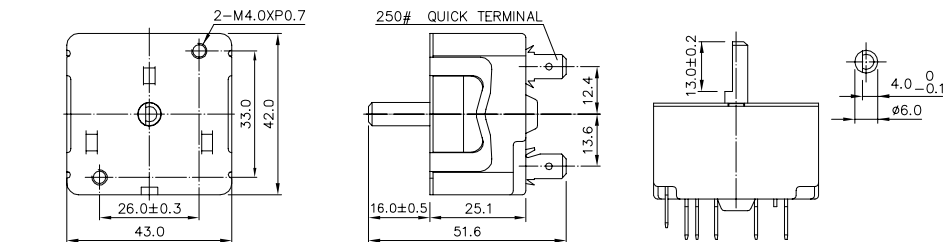

CIRCUIT

