









SPECIFICATION



RATING:	10A 250VAC, 15A 250VAC
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	70°C

SIZE

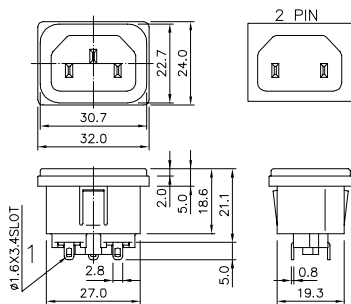

MOUNTING HOLE
(FOR REFERENCE)
PANEL THICK:1.0, 1.2, 1.5, 2.0