


3018 SERIES



SPECIFICATION

RATING:	10A 125VAC, 6A 250VAC (UL, CUL) 6(4)A 250V~ T85 (ENEC)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	10,000 CYCLES

SIZE

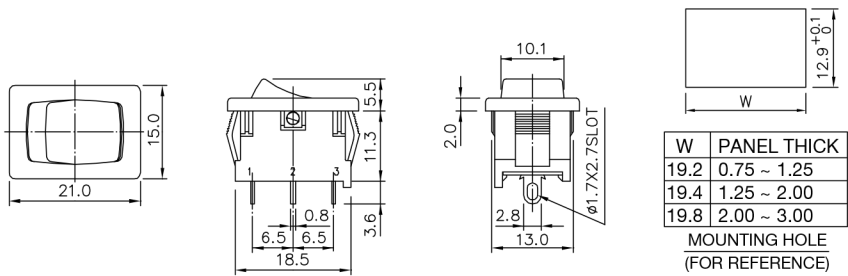

HOW TO ORDER

3018 - □ - □ - □ - □

PRINT			TERMINAL	KNOB COLOR	BODY COLOR
P1: 	P7: 	P15: 	T1:2.8xt0.8 	BK: BLACK	BK: BLACK
P2: 	P8: 	P16: 	T2:4.75xt0.8 	GW: GRAY WHITE	GW: GRAY WHITE
P3: 	P9: 		T3:4.75xt0.5 	SW: SNOW WHITE	SW: SNOW WHITE
P4: 	P12: 			WT: WHITE	WT: WHITE
P5: 	P13: 				
P6: 	P14: 				


3053 SERIES



SPECIFICATION

RATING:	10A 125VAC, 6A 250VAC (UL, CUL)
INSULATION RESISTANCE:	DC 500V 100MΩ OR MORE
CONTACT RESISTANCE:	DC 2-4V 1A 20mΩ OR LESS
WITHSTAND VOLTAGE:	AC 1500V FOR 1 Min
AMBIENT TEMPERATURE:	0~85°C
ELECTRICAL LIFE:	6,000 CYCLES

SIZE

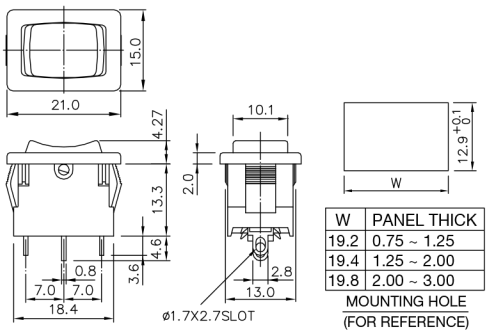

HOW TO ORDER

3053 - □ - □ - □ - □ - □

PRINT	TERMINAL	CIRCUIT	KNOB COLOR	BODY COLOR
P0: 	T1: 2.8xt0.8 	C01: SPDT ON-OFF-ON	BK: BLACK	BK: BLACK
P1: 	T2: 4.75xt0.8 	C02: SPDT (ON)-OFF-(ON)		