


SPECIFICATION



CONTACT RATING	: 5A @125 VAC or 28 VDC 3A @250 VAC
ELECTRICAL LIFE	:30,000 make-and-break cycles at full load
CONTACT RESISTANCE	: 10 mΩ max. initial @2-4 VDC, 100 mA
INSULATION RESISTANCE	: 1,000 MΩ min.
DIELECTRIC STRENGTH	: 1,500 V RMS @ sea level.
OPERATING TEMPERATURE	: -30°C to +85°C

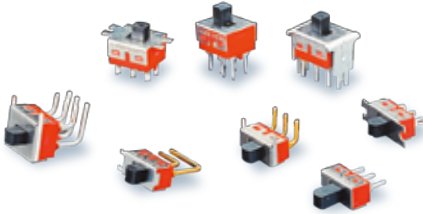



MATERIALS


CASE - diallyl phthalate (DAP)
 SLIDE HANDLE - Nylon
 HOUSING - Stainless Steel
 CONTACT AND TERMINAL - Copper alloy, silver plated

How do you build the switches you need!!

The straight type , please see the (A) ;

The right angle P.C terminals, please see the (B)

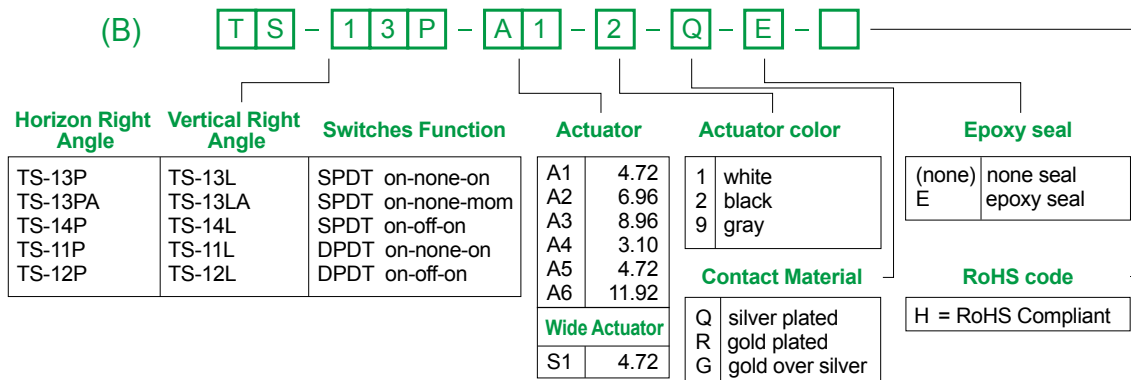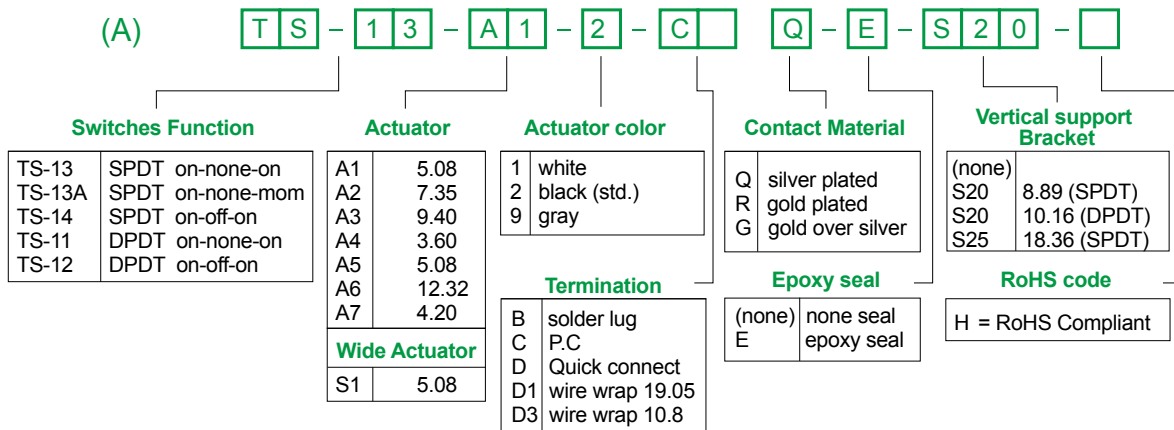



SPECIFICATION



CONTACT RATING:Q	: Q: 3A @120 VAC or 28 VDC
ELECTRICAL LIFE	: 30,000 make-and-break cycles at full load
CONTACT RESISTANCE	: 20 mΩ max. initial @2-4 VDC, 100 mA
INSULATION RESISTANCE	: 1,000 MΩ min.
DIELECTRIC STRENGTH	: 1,500 V RMS @ sea level.
OPERATING TEMPERATURE	: -30°C to +85°C

MATERIALS

CASE - diallyl phthalate (DAP)
 SLIDE HANDLE -Nylon
 HOUSING -Brass, tin plated
 CONTACT AND TERMINAL - Copper alloy, silver plated
 SWITCH SUPPORT - Copper alloy , tin plated

How do you build the switches you need!!

